

Предохранительные выключатели с транспондерами, без защитной блокировки CES-AP

Технические характеристики

По вопросам продаж и поддержки обращайтесь:

Алматы (727)345-47-04
Ангарск (3955)60-70-56
Архангельск (8182)63-90-72
Астрахань (8512)99-46-04
Барнаул (3852)73-04-60
Белгород (4722)40-23-64
Благовещенск (4162)22-76-07
Брянск (4832)59-03-52
Владивосток (423)249-28-31
Владикавказ (8672)28-90-48
Владимир (4922)49-43-18
Волгоград (844)278-03-48
Вологда (8172)26-41-59
Воронеж (473)204-51-73
Екатеринбург (343)384-55-89

Иваново (4932)77-34-06
Ижевск (3412)26-03-58
Иркутск (395)279-98-46
Казань (843)206-01-48
Калининград (4012)72-03-81
Калуга (4842)92-23-67
Кемерово (3842)65-04-62
Киров (8332)68-02-04
Коломна (4966)23-41-49
Кострома (4942)77-07-48
Краснодар (861)203-40-90
Красноярск (391)204-63-61
Курск (4712)77-13-04
Курган (3522)50-90-47
Липецк (4742)52-20-81

Магнитогорск (3519)55-03-13
Москва (495)268-04-70
Мурманск (8152)59-64-93
Набережные Челны (8552)20-53-41
Нижний Новгород (831)429-08-12
Новокузнецк (3843)20-46-81
Ноябрьск (3496)41-32-12
Новосибирск (383)227-86-73
Омск (3812)21-46-40
Орел (4862)44-53-42
Оренбург (3532)37-68-04
Пенза (8412)22-31-16
Петрозаводск (8142)55-98-37
Псков (8112)59-10-37
Пермь (342)205-81-47

Ростов-на-Дону (863)308-18-15
Рязань (4912)46-61-64
Самара (846)206-03-16
Санкт-Петербург (812)309-46-40
Саратов (845)249-38-78
Севастополь (8692)22-31-93
Саранск (8342)22-96-24
Симферополь (3652)67-13-56
Смоленск (4812)29-41-54
Сочи (862)225-72-31
Ставрополь (8652)20-65-13
Сургут (3462)77-98-35
Сыктывкар (8212)25-95-17
Тамбов (4752)50-40-97
Тверь (4822)63-31-35

Тольятти (8482)63-91-07
Томск (3822)98-41-53
Тула (4872)33-79-87
Тюмень (3452)66-21-18
Ульяновск (8422)24-23-59
Улан-Удэ (3012)59-97-51
Уфа (347)229-48-12
Хабаровск (4212)92-98-04
Чебоксары (8352)28-53-07
Челябинск (351)202-03-61
Череповец (8202)49-02-64
Чита (3022)38-34-83
Якутск (4112)23-90-97
Ярославль (4852)69-52-93

Россия +7(495)268-04-70

Казахстан +(727)345-47-04

Беларусь +(375)257-127-884

Узбекистан +998(71)205-18-59

Киргизия +996(312)96-26-47

эл.почта: eai@nt-rt.ru || сайт: <https://euchner.nt-rt.ru/>

SAFETY SWITCH CES-AP



Benefits for you

- High level of protection against tampering
- Category 4 / PL e according to EN ISO 13849-1
- Integrated short circuit monitoring
- Large actuating range
- Connection via plug connectors
- Diagnostics using LED



111145

CES-AP-C01-AH-SB-111145

Non-contact safety switch CES-AP-C01-...

- Safety switch with integrated evaluation electronics
- No series connection
- Short circuit monitoring
- 2 safety outputs (semiconductor outputs)
- Category 4 / PL e according to EN ISO 13849-1
- M12 plug connector 5-pin; pin 5 not used
- Unicode

**100250**

CES-AP-C01-CH-SA-100250

Non-contact safety switch CES-AP-C01-...

- Safety switch with integrated evaluation electronics
- No series connection
- Short circuit monitoring
- 2 safety outputs (semiconductor outputs)
- Category 4 / PL e according to EN ISO 13849-1
- M12 plug connector 8-pin
- Multicode

**106798**

CES-AP-C01-CH-SB-106798

Non-contact safety switch CES-AP-C01-...

- Safety switch with integrated evaluation electronics
- No series connection
- Short circuit monitoring
- 2 safety outputs (semiconductor outputs)
- Category 4 / PL e according to EN ISO 13849-1
- M12 plug connector 5-pin
- Multicode


**111708**

CES-AP-C01-CH-SB-111708

Non-contact safety switch CES-AP-C01-...

- Safety switch with integrated evaluation electronics
- No series connection
- Short circuit monitoring
- 2 safety outputs (semiconductor outputs)
- Category 4 / PL e according to EN ISO 13849-1
- M12 plug connector 5-pin; pin 5 not used

- Multicode

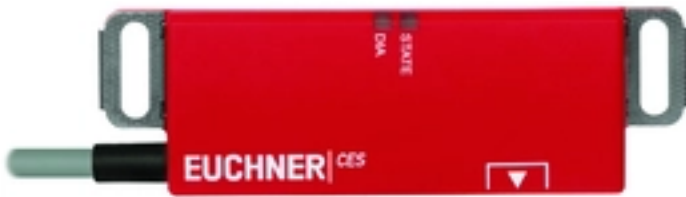


105603

CES-AP-CL2-AH-L05-105603

Non-contact safety switch CES-AP-CL2-..., flying lead, PVC

- Safety switch with integrated evaluation electronics
- No series connection
- Short circuit monitoring
- 2 safety outputs (semiconductor outputs)
- Door hinge left
- Category 4 / PL e according to EN ISO 13849-1
- Connecting cable PVC, 5 m, flying lead, 6-core
- Unicode
- Two safety screws M4x14 included

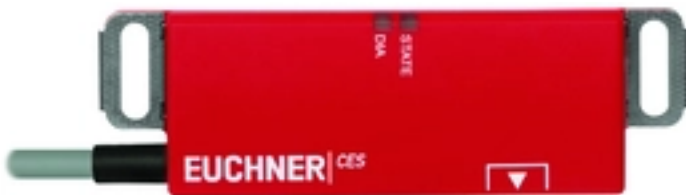

106192

CES-AP-CL2-AH-L10-106192

Non-contact safety switch CES-AP-CL2-..., flying lead, PVC

- Safety switch with integrated evaluation electronics
- No series connection
- Short circuit monitoring
- 2 safety outputs (semiconductor outputs)
- Door hinge left
- Category 4 / PL e according to EN ISO 13849-1
- Connecting cable PVC, 10 m, flying lead, 6-core
- Unicode
- Two safety screws M4x14 included



106553

CES-AP-CL2-AH-SB-106553

Non-contact safety switch CES-AP-CL2-... , M12, PUR

- Safety switch with integrated evaluation electronics
- No series connection
- Short circuit monitoring
- 2 safety outputs (semiconductor outputs)
- Door hinge left
- Category 4 / PL e according to EN ISO 13849-1
- Connecting cable PUR, 0.2 m, plug connector M12, 5-core
- Unicode
- Two safety screws M4x14 included



111747

CES-AP-CL2-AH-SB-111747

Non-contact safety switch CES-AP-CL2-... , M12; pin 5 not used, PUR

- Safety switch with integrated evaluation electronics
- No series connection
- Short circuit monitoring
- 2 safety outputs (semiconductor outputs)
- Door hinge left
- Category 4 / PL e according to EN ISO 13849-1
- Connecting cable PUR, 0.2 m, plug connector M12, 5-pin; pin 5 not used
- Unicode
- Two safety screws M4x14 included



105294

CES-AP-CL2-AH-SF-105294

Non-contact safety switch CES-AP-CL2-... , with latching connection

- Safety switch with integrated evaluation electronics
- No series connection
- Short circuit monitoring
- 2 safety outputs (semiconductor outputs)
- Door hinge left
- Category 4 / PL e according to EN ISO 13849-1
- Plug connector with latching connection, 6-pin
- Unicode
- Two safety screws M4x14 included




105602

CES-AP-CL2-CH-L05-105602

Non-contact safety switch CES-AP-CL2-..., flying lead, PVC

- Safety switch with integrated evaluation electronics
- No series connection
- Short circuit monitoring
- 2 safety outputs (semiconductor outputs)
- Door hinge left
- Category 4 / PL e according to EN ISO 13849-1
- Connecting cable PVC, 5 m, flying lead, 6-core
- Multicode
- Two safety screws M4x14 included

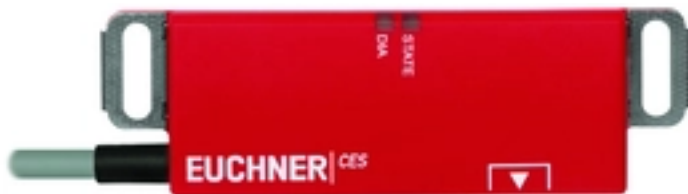


106190

CES-AP-CL2-CH-L10-106190

Non-contact safety switch CES-AP-CL2-..., flying lead, PVC

- Safety switch with integrated evaluation electronics
- No series connection
- Short circuit monitoring
- 2 safety outputs (semiconductor outputs)
- Door hinge left
- Category 4 / PL e according to EN ISO 13849-1
- Connecting cable PVC, 10 m, flying lead, 6-core
- Multicode
- Two safety screws M4x14 included

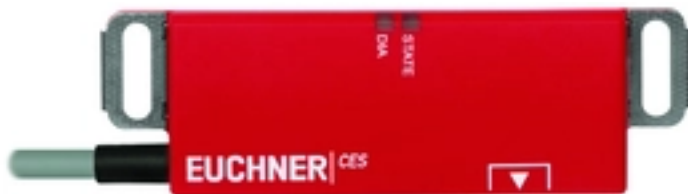

106194

CES-AP-CL2-CH-L20-106194

Non-contact safety switch CES-AP-CL2-..., flying lead, PVC

- Safety switch with integrated evaluation electronics
- No series connection

- Short circuit monitoring
- 2 safety outputs (semiconductor outputs)
- Door hinge left
- Category 4 / PL e according to EN ISO 13849-1
- Connecting cable PVC, 20 m, flying lead, 6-core
- Multicode
- Two safety screws M4x14 included



106551

CES-AP-CL2-CH-SB-106551

Non-contact safety switch CES-AP-CL2-... , M12, PUR

- Safety switch with integrated evaluation electronics
- No series connection
- Short circuit monitoring
- 2 safety outputs (semiconductor outputs)
- Door hinge left
- Category 4 / PL e according to EN ISO 13849-1
- Connecting cable PUR, 0.2 m, plug connector M12, 5-core
- Multicode
- Two safety screws M4x14 included



109167

CES-AP-CL2-CH-SB-109167

Non-contact safety switch CES-AP-CL2-... , M12; pin 5 not used, PUR

- Safety switch with integrated evaluation electronics
- No series connection
- Short circuit monitoring
- 2 safety outputs (semiconductor outputs)
- Door hinge left
- Category 4 / PL e according to EN ISO 13849-1
- Connecting cable PUR, 0.2 m, plug connector M12, 5-pin; pin 5 not used
- Multicode
- Two safety screws M4x14 included




104509

CES-AP-CL2-CH-SF-104509

Non-contact safety switch CES-AP-CL2-..., with latching connection

- Safety switch with integrated evaluation electronics
- No series connection
- Short circuit monitoring
- 2 safety outputs (semiconductor outputs)
- Door hinge left
- Category 4 / PL e according to EN ISO 13849-1
- Plug connector with latching connection, 6-pin
- Multicode
- Two safety screws M4x14 included

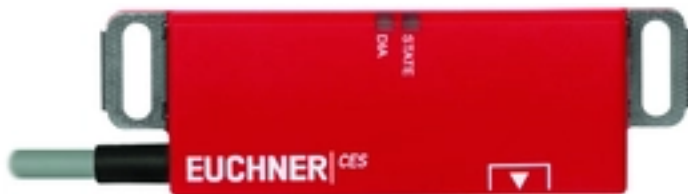


105601

CES-AP-CR2-AH-L05-105601

Non-contact safety switch CES-AP-CR2-..., flying lead, PVC

- Safety switch with integrated evaluation electronics
- No series connection
- Short circuit monitoring
- 2 safety outputs (semiconductor outputs)
- Door hinge right
- Category 4 / PL e according to EN ISO 13849-1
- Connecting cable PVC, 5 m, flying lead, 6-core
- Unicode
- Two safety screws M4x14 included

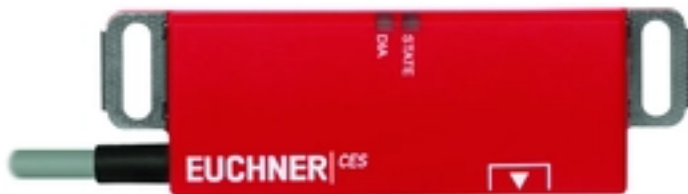


106191

CES-AP-CR2-AH-L10-106191

Non-contact safety switch CES-AP-CR2-..., flying lead, PVC

- Safety switch with integrated evaluation electronics
- No series connection

- Short circuit monitoring
- 2 safety outputs (semiconductor outputs)
- Door hinge right
- Category 4 / PL e according to EN ISO 13849-1
- Connecting cable PVC, 10 m, flying lead, 6-core
- Unicode
- Two safety screws M4x14 included

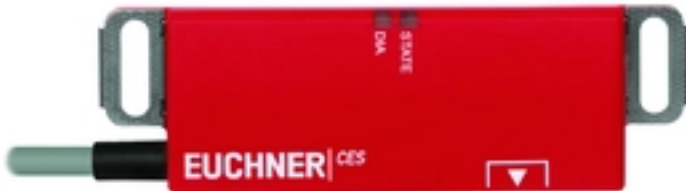

106195

CES-AP-CR2-AH-L20-106195

Non-contact safety switch CES-AP-CR2-..., flying lead, PVC

- Safety switch with integrated evaluation electronics
- No series connection
- Short circuit monitoring
- 2 safety outputs (semiconductor outputs)
- Door hinge right
- Category 4 / PL e according to EN ISO 13849-1
- Connecting cable PVC, 20 m, flying lead, 6-core
- Unicode
- Two safety screws M4x14 included



106552

CES-AP-CR2-AH-SB-106552

Non-contact safety switch CES-AP-CR2-... , M12, PUR

- Safety switch with integrated evaluation electronics
- No series connection
- Short circuit monitoring
- 2 safety outputs (semiconductor outputs)
- Door hinge right
- Category 4 / PL e according to EN ISO 13849-1
- Connecting cable PUR, 0.2 m, plug connector M12, 5-core
- Unicode
- Two safety screws M4x14 included



111748

CES-AP-CR2-AH-SB-111748

Non-contact safety switch CES-AP-CR2-... , M12; pin 5 not used, PUR

- Safety switch with integrated evaluation electronics
- No series connection
- Short circuit monitoring
- 2 safety outputs (semiconductor outputs)
- Door hinge right
- Category 4 / PL e according to EN ISO 13849-1
- Connecting cable PUR, 0.2 m, plug connector M12, 5-pin; pin 5 not used
- Unicode
- Two safety screws M4x14 included




105295

CES-AP-CR2-AH-SF-105295

Non-contact safety switch CES-AP-CR2-... , with latching connection

- Safety switch with integrated evaluation electronics
- No series connection
- Short circuit monitoring
- 2 safety outputs (semiconductor outputs)
- Door hinge right
- Category 4 / PL e according to EN ISO 13849-1
- Plug connector with latching connection, 6-pin
- Unicode
- Two safety screws M4x14 included

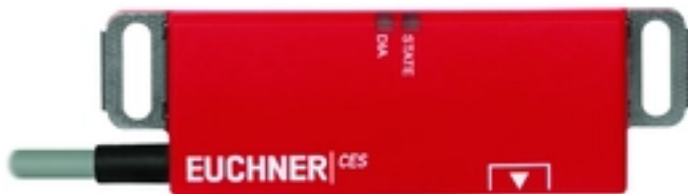


105600

CES-AP-CR2-CH-L05-105600

Non-contact safety switch CES-AP-CR2-..., flying lead, PVC

- Safety switch with integrated evaluation electronics
- No series connection

- Short circuit monitoring
- 2 safety outputs (semiconductor outputs)
- Door hinge right
- Category 4 / PL e according to EN ISO 13849-1
- Connecting cable PVC, 5 m, flying lead, 6-core
- Multicode
- Two safety screws M4x14 included

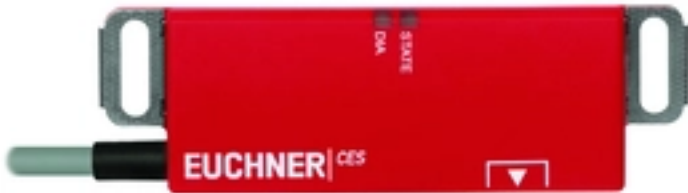

106189

CES-AP-CR2-CH-L10-106189

Non-contact safety switch CES-AP-CR2-..., flying lead, PVC

- Safety switch with integrated evaluation electronics
- No series connection
- Short circuit monitoring
- 2 safety outputs (semiconductor outputs)
- Door hinge right
- Category 4 / PL e according to EN ISO 13849-1
- Connecting cable PVC, 10 m, flying lead, 6-core
- Multicode
- Two safety screws M4x14 included



106550

CES-AP-CR2-CH-SB-106550

Non-contact safety switch CES-AP-CR2-... , M12, PUR

- Safety switch with integrated evaluation electronics
- No series connection
- Short circuit monitoring
- 2 safety outputs (semiconductor outputs)
- Door hinge right
- Category 4 / PL e according to EN ISO 13849-1
- Connecting cable PUR, 0.2 m, plug connector M12, 5-core
- Multicode
- Two safety screws M4x14 included



109168

CES-AP-CR2-CH-SB-109168

Non-contact safety switch CES-AP-CR2-... , M12; pin 5 not used, PUR

- Safety switch with integrated evaluation electronics
- No series connection
- Short circuit monitoring
- 2 safety outputs (semiconductor outputs)
- Door hinge right
- Category 4 / PL e according to EN ISO 13849-1
- Connecting cable PUR, 0.2 m, plug connector M12, 5-pin; pin 5 not used
- Multicode
- Two safety screws M4x14 included



123922

CES-AP-CR2-CH-SB-123922

Non-contact safety switch CES-AP-CR2-... , M12; pin 5 used, PVC

- Safety switch with integrated evaluation electronics
- No series connection
- Short circuit monitoring
- 2 safety outputs (semiconductor outputs)
- Door hinge right
- Category 4 / PL e according to EN ISO 13849-1
- Connecting cable PVC, 2 m, plug connector M12, 5-pin; pin 5 used
- Multicode
- Two safety screws M4x14 included



100775

CES-AP-CR2-CH-SF-100775

Non-contact safety switch CES-AP-CR2-... , with latching connection

- Safety switch with integrated evaluation electronics
- No series connection

- Short circuit monitoring
- 2 safety outputs (semiconductor outputs)
- Door hinge right
- Category 4 / PL e according to EN ISO 13849-1
- Plug connector with latching connection, 6-pin
- Multicode
- Two safety screws M4x14 included



117325

CES-I-AP-M-C04-SK-117325

Non-contact safety switches CES-I-AP-.-C04-..., M8

- Safety switch with integrated evaluation electronics
- No series connection
- Short circuit monitoring
- 2 safety outputs (semiconductor outputs)
- Category 4 / PL e according to EN ISO 13849-1
- Three active faces
- With plug connector M8, 4-pin
- Multicode



117328

CES-I-AP-M-C04-U05-117328

Non-contact safety switches CES-I-AP-.- C04-..., flying lead

- Safety switch with integrated evaluation electronics
- No series connection
- Short circuit monitoring
- 2 safety outputs (semiconductor outputs)
- Category 4 / PL e according to EN ISO 13849-1
- Three active faces
- Connecting cable PUR, 5 m, flying lead
- Multicode
- Monitoring output OD



117329

CES-I-AP-M-C04-U10-117329

Non-contact safety switches CES-I-AP-. C04-..., flying lead

- Safety switch with integrated evaluation electronics
- No series connection
- Short circuit monitoring
- 2 safety outputs (semiconductor outputs)
- Category 4 / PL e according to EN ISO 13849-1
- Three active faces
- Connecting cable PUR, 10 m, flying lead
- Multicode
- Monitoring output OD



117330

CES-I-AP-M-C04-U20-117330

Non-contact safety switches CES-I-AP-. C04-..., flying lead

- Safety switch with integrated evaluation electronics
- No series connection
- Short circuit monitoring
- 2 safety outputs (semiconductor outputs)
- Category 4 / PL e according to EN ISO 13849-1
- Three active faces
- Connecting cable PUR, 20 m, flying lead
- Multicode
- Monitoring output OD



117324

CES-I-AP-M-C04-USB-117324

Non-contact safety switches CES-I-AP-.C04-..., M12

- Safety switch with integrated evaluation electronics
- No series connection

- Short circuit monitoring
- 2 safety outputs (semiconductor outputs)
- Category 4 / PL e according to EN ISO 13849-1
- Three active faces
- Connecting cable PUR, 0.22 m, plug connector M12, 5-core
- Multicode
- Monitoring output OD



117323

CES-I-AP-M-C04-USI-117323

Non-contact safety switches CES-I-AP-.-C04-, M12; pin 5 not used

- Safety switch with integrated evaluation electronics
- No series connection
- Short circuit monitoring
- 2 safety outputs (semiconductor outputs)
- Category 4 / PL e according to EN ISO 13849-1
- Three active faces
- Connecting cable PUR, 0.1 m, plug connector M12, 5-pin; pin 5 not used
- Multicode



160832

CES-I-AP-M-C04-USI-160832

Non-contact safety switches CES-I-AP-.-C04-, M12; pin 5 not used

- Safety switch with integrated evaluation electronics
- No series connection
- Short circuit monitoring
- 2 safety outputs (semiconductor outputs)
- Category 4 / PL e according to EN ISO 13849-1
- Three active faces
- Connecting cable PUR, 1.5 m, plug connector M12, 5-pin; pin 5 not used
- Multicode



162592

CES-I-AP-M-C04-USI-162592

Non-contact safety switches CES-I-AP-.-C04-, M12; pin 5 not used

- Safety switch with integrated evaluation electronics
- No series connection
- Short circuit monitoring
- 2 safety outputs (semiconductor outputs)
- Category 4 / PL e according to EN ISO 13849-1
- Three active faces
- Connecting cable PUR, 2 m, plug connector M12, 5-pin; pin 5 not used
- Multicode



158631

CES-I-AP-M-C14-U20-158631

Non-contact safety switches CES-I-AP-.-C14-..., with cable end sleeves

- Safety switch with integrated evaluation electronics
- Safety switch CES-C04 encapsulated in epoxy resin
- Tested for material resistance in accordance with Ecolab specifications
- 2 safety outputs (semiconductor outputs)
- Category 4 / PL e according to EN ISO 13849-1
- Three active faces
- Connecting cable PUR, 20 m, with cable end sleeves
- Multicode
- Monitoring output OD



115324

CES-I-AP-U-C04-SK-115324

Non-contact safety switches CES-I-AP-.-C04-..., M8

- Safety switch with integrated evaluation electronics
- No series connection
- Short circuit monitoring
- 2 safety outputs (semiconductor outputs)
- Category 4 / PL e according to EN ISO 13849-1
- Three active faces
- With plug connector M8, 4-pin
- Unicode



116503

CES-I-AP-U-C04-U05-116503

Non-contact safety switches CES-I-AP-.- C04-..., flying lead

- Safety switch with integrated evaluation electronics
- No series connection
- Short circuit monitoring
- 2 safety outputs (semiconductor outputs)
- Category 4 / PL e according to EN ISO 13849-1
- Three active faces
- Connecting cable PUR, 5 m, flying lead
- Unicode
- Monitoring output OD



116504

CES-I-AP-U-C04-U10-116504

Non-contact safety switches CES-I-AP-.- C04-..., flying lead

- Safety switch with integrated evaluation electronics
- No series connection
- Short circuit monitoring
- 2 safety outputs (semiconductor outputs)
- Category 4 / PL e according to EN ISO 13849-1
- Three active faces
- Connecting cable PUR, 10 m, flying lead
- Unicode
- Monitoring output OD



116505

CES-I-AP-U-C04-U20-116505

Non-contact safety switches CES-I-AP-.- C04-..., flying lead

- Safety switch with integrated evaluation electronics

- No series connection
- Short circuit monitoring
- 2 safety outputs (semiconductor outputs)
- Category 4 / PL e according to EN ISO 13849-1
- Three active faces
- Connecting cable PUR, 20 m, flying lead
- Unicode
- Monitoring output OD



116502

CES-I-AP-U-C04-USB-116502

Non-contact safety switches CES-I-AP-.-C04-..., M12

- Safety switch with integrated evaluation electronics
- No series connection
- Short circuit monitoring
- 2 safety outputs (semiconductor outputs)
- Category 4 / PL e according to EN ISO 13849-1
- Three active faces
- Connecting cable PUR, 0.22 m, plug connector M12, 5-core
- Unicode
- Monitoring output OD



115150

CES-I-AP-U-C04-USI-115150

Non-contact safety switches CES-I-AP-.-C04-, M12; pin 5 not used

- Safety switch with integrated evaluation electronics
- No series connection
- Short circuit monitoring
- 2 safety outputs (semiconductor outputs)
- Category 4 / PL e according to EN ISO 13849-1
- Three active faces
- Connecting cable PUR, 0.1 m, plug connector M12, 5-pin; pin 5 not used
- Unicode



158632

CES-I-AP-U-C14-U20-158632

Non-contact safety switches CES-I-AP-.-C14-..., with cable end sleeves

- Safety switch with integrated evaluation electronics
- Safety switch CES-C04 encapsulated in epoxy resin
- Tested for material resistance in accordance with Ecolab specifications
- 2 safety outputs (semiconductor outputs)
- Category 4 / PL e according to EN ISO 13849-1
- Three active faces
- Connecting cable PUR, 20 m, with cable end sleeves
- Unicode
- Monitoring output OD

По вопросам продаж и поддержки обращайтесь:

Алматы (727)345-47-04
Ангарск (3955)60-70-56
Архангельск (8182)63-90-72
Астрахань (8512)99-46-04
Барнаул (3852)73-04-60
Белгород (4722)40-23-64
Благовещенск (4162)22-76-07
Брянск (4832)59-03-52
Владивосток (423)249-28-31
Владикавказ (8672)28-90-48
Владимир (4922)49-43-18
Волгоград (844)278-03-48
Вологда (8172)26-41-59
Воронеж (473)204-51-73
Екатеринбург (343)384-55-89

Иваново (4932)77-34-06
Ижевск (3412)26-03-58
Иркутск (395)279-98-46
Казань (843)206-01-48
Калининград (4012)72-03-81
Калуга (4842)92-23-67
Кемерово (3842)65-04-62
Киров (8332)68-02-04
Коломна (4966)23-41-49
Кострома (4942)77-07-48
Краснодар (861)203-40-90
Красноярск (391)204-63-61
Курск (4712)77-13-04
Курган (3522)50-90-47
Липецк (4742)52-20-81

Магнитогорск (3519)55-03-13
Москва (495)268-04-70
Мурманск (8152)59-64-93
Набережные Челны (8552)20-53-41
Нижний Новгород (831)429-08-12
Новокузнецк (3843)20-46-81
Ноябрьск (3496)41-32-12
Новосибирск (383)227-86-73
Омск (3812)21-46-40
Орел (4862)44-53-42
Оренбург (3532)37-68-04
Пенза (8412)22-31-16
Петрозаводск (8142)55-98-37
Псков (8112)59-10-37
Пермь (342)205-81-47

Ростов-на-Дону (863)308-18-15
Рязань (4912)46-61-64
Самара (846)206-03-16
Санкт-Петербург (812)309-46-40
Саратов (845)249-38-78
Севастополь (8692)22-31-93
Саранск (8342)22-96-24
Симферополь (3652)67-13-56
Смоленск (4812)29-41-54
Сочи (862)225-72-31
Ставрополь (8652)20-65-13
Сургут (3462)77-98-35
Сыктывкар (8212)25-95-17
Тамбов (4752)50-40-97
Тверь (4822)63-31-35

Тольятти (8482)63-91-07
Томск (3822)98-41-53
Тула (4872)33-79-87
Тюмень (3452)66-21-18
Ульяновск (8422)24-23-59
Улан-Удэ (3012)59-97-51
Уфа (347)229-48-12
Хабаровск (4212)92-98-04
Чебоксары (8352)28-53-07
Челябинск (351)202-03-61
Череповец (8202)49-02-64
Чита (3022)38-34-83
Якутск (4112)23-90-97
Ярославль (4852)69-52-93

Россия +7(495)268-04-70

Казахстан +(727)345-47-04

Беларусь +(375)257-127-884

Узбекистан +998(71)205-18-59

Киргизия +996(312)96-26-47

эл.почта: eai@nt-rt.ru || сайт: <https://euchner.nt-rt.ru/>